


Bulletin Description

All major epoxy grouts on the market today have sufficient Compressive Strength to bear the weight of the equipment they support. It is more important compare grouts based on how compatible they are with both the concrete and steel it is connected to. Therefore, the most important design criteria for an epoxy grout are those physical properties that directly affect the grout's compatibility with concrete and steel; Coefficient of Linear Thermal Expansion and Peak Exotherm.

Coefficient of Expansion


Coefficient of Linear Thermal Expansion (CTE) is the amount something will expand or contract when it is subjected to a 1°F increase or decrease in temperature. It is expressed in units of inch per inch, degree of temperature change of the material. The following is a listing of the CTE's for concrete, steel and various epoxy grouts as published by their respective manufacturers:

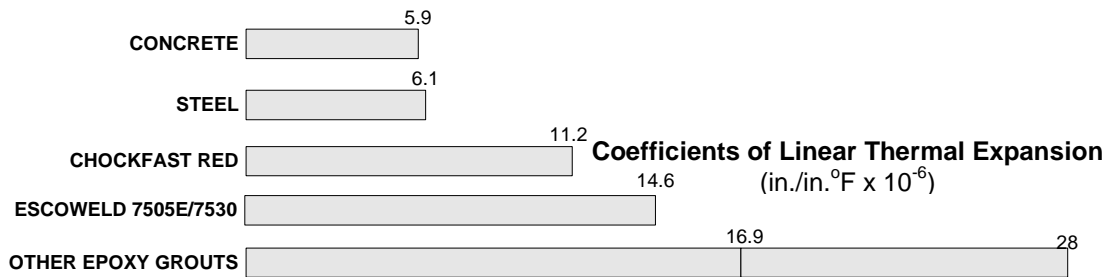

The closer the CTE of two materials are, the more compatible those materials are. They are compatible because they will tend to grow and shrink together as the outside temperature increases and decreases.

Peak Exotherm

Peak Exotherm (PE) is the maximum temperature that an epoxy reaches during its cure. This is also the point at which the epoxy changes from liquid to solid. The equipment operating temperature that produces no thermal stress is be equal to the peak exotherm temperature for that epoxy. For this reason CHOCKFAST RED and ESCOWELD 7505E/7530 were formulated to have the lowest peak exotherm possible (95°F to 130°F depending on depth).

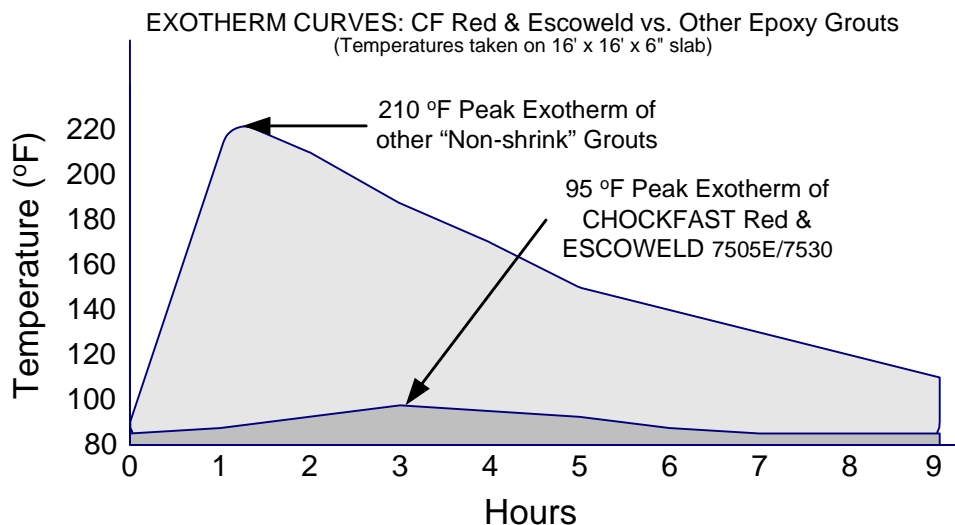

ITW POLYMER TECHNOLOGIES

130 Commerce Drive • Montgomeryville, PA 18936 • 215-855-8450 • Fax 215-855-4688

www.chockfastgrout.com • www.escoweld.com



ITW Polymer Technologies
Registered to ISO 9001:2000
File No. A3790




ITW Performance Polymer Europe
ISO 9001:2000
Q 05-120

Application Instructions

Because CHOCKFAST Red and ESCOWELD 7505E/7530 are gently curing epoxy grouts, their peak exotherm temperatures are usually very close to the foundation temperature underneath operating equipment. This small difference between the peak exotherm temperature and the operating temperature results in minimum foundation stress.

When machinery is not operating, freezing conditions may occur. In this case, the epoxy grout will want to contract more than the concrete or steel because it has a higher CTE's. As a result of the epoxy bond to the concrete, the epoxy will be put into compression and the concrete into tension.

When the temperature drops...

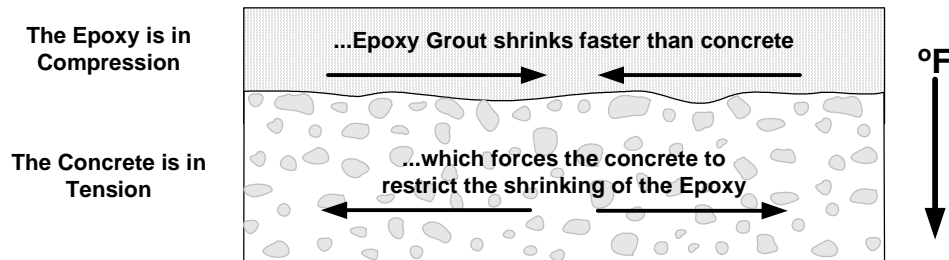

If the temperature drops far enough, the epoxy may build up sufficient tension to crack, or shear the bond line with the concrete. By using expansion joints installed in accordance with ITW Philadelphia Resins' procedures, stress cracking can be avoided and longer life can be expected from properly designed foundations. Please see Bulletins No. 662 and 645 for more information on expansion joints.

Example Calculating Linear Contraction of Epoxy

The following example calculates the Linear Contraction of epoxy grout starting at the grout's Peak Exotherm and returning to a foundation temperature of 70°F. The formula for Linear Contraction is:

Linear Contraction (in/in) = Coefficient of Thermal Expansion (CTE) X Change in Temperature (ΔT)

Grout	CTE	ΔT (PE - 70°)	Linear Contraction
CHOCKFAST RED	$11.2 \times 10^{-6} \text{ in/in/}^\circ\text{F}$	$(95 - 70)^\circ\text{F} =$	$28.0 \times 10^{-5} \text{ in/in}$
Other Grout	$27.0 \times 10^{-6} \text{ in/in/}^\circ\text{F}$	$(210 - 70)^\circ\text{F} =$	$378.0 \times 10^{-5} \text{ in/in}$

This shows that the linear contraction of the competitive grout is 13 times as more than the linear contraction of the CHOCKFAST Red. Of course, if the foundation temperature were 95°F, there would be no linear contraction of CHOCKFAST Red.

Conclusion

A foundation that is healthy over the long-term is the result of a low peak exotherm coupled with a low Coefficient of Linear Thermal Expansion. CHOCKFAST Red and ESCOWELD 7505E/7530 were formulated to maintain these properties in single pours 18" deep if necessary. The compatibility of these grouts with concrete ensures a problem-free foundation for many years of operation

Date

06/2006

<p>General: Every reasonable effort is made to insure the technical information and recommendations on these data pages are true and accurate to the best of our knowledge at the date of issuance. However, this information is subject to change without notice. Prior versions of this publication are invalid with the release of this version. Products and information are intended for use by qualified applicators that have the required background, technical knowledge, and equipment to perform said tasks in a satisfactory manner. Consult your local distributor for product availability, additional product information, and technical support.</p> <p>Warranty: ITW Polymer Technologies, a division of Illinois Tool Works Inc., warrants that its products meet their printed specifications. This is the sole warranty. This warranty expires one year after product shipment.</p> <p>Warranty Claims: If any product fails to meet the above, ITW Polymer Technologies will, at its option, either replace the product or refund the purchase price. ITW Polymer Technologies will have no other liability for breach of warranty, negligence, or otherwise. All warranty claims must be made in writing within one year of the date of shipment. No other claims will be considered.</p> <p>Disclaimer: ITW Polymer Technologies makes no other warranty, expressed or implied, and specifically disclaims any warranty of merchantability or fitness for a particular purpose.</p>	<p>Suggestions concerning the use of products are not warranties. The purchaser assumes the responsibility for determining suitability of products and appropriate use. ITW Polymer Technologies' sole liability, for breach of warranty, negligence or otherwise, shall be the replacement of product or refund of the purchase price, at ITW Polymer Technologies' election. Under no circumstances shall ITW Polymer Technologies be liable for any indirect, incidental or consequential damages.</p> <p>Modification of Warranty: No distributor or sales representative has the authority to change the above provisions. No change in the above provisions will be valid unless in writing and signed by an officer or the Technical Director of ITW Polymer Technologies. No term of any purchase order shall serve to modify any provision of this document.</p> <p>Mediation and Arbitration: If any dispute arises relating to products or product warranties, either the purchaser or ITW Polymer Technologies may a) initiate mediation under the then current Center for Public Resources (CPR) Model Procedure for Mediation of Business Disputes, or b) initiate a non-binding arbitration under the rules of the American Arbitration Association for the resolution of commercial disputes.</p>
--	---